

LEDGESTONE

BLACK FROST
LEDGESTONE



GEOLOGY

quartzitic sandstone - quarried in USA

COLOR RANGE

blacks, charcoals, grays, blues, whites, with occasional greens, buffs, and browns

CONSISTENCY PER PALLET

somewhat consistent

PALLET AMOUNTS

FULL VENEER (sold/ton) 4,000lbs each

THIN VENEER (sold/each) QB or BX

QUANTITY BOX - QB

1 - 100 sq ft of flats

1 - 50 lin ft of corners

SMALL BOX - BX

24 - 8 sq ft flat boxes, 192 total ft

20 - 8 lin ft corner boxes, 160 total feet

ASTM TESTING DATA

BLACK FROST C97

water absorption—0.2%

BLACK FROST C97

specific gravity—3.051

BLACK FROST C97

density—190.4 pcf

BLACK FROST C99

modulus of rupture dry—3,040 psi

modulus of rupture wet—2,610 psi

BLACK FROST C170

compressive strength parallel dry—15,070 psi

compressive strength parallel

wet—12,070 psi

compressive strength perpendicular

dry—25,340 psi

compressive strength perpendicular

wet—15,070 psi

PART NUMBERS

FULL VENEER:

1BSTGRA03033TN

THIN VENEER:

QB flat: 1BTVGRA03033QB

BX flat: 1BTVGRA03033BX

QB corner: 1BTVGRA03533QB

BX corner: 1BTVGRA03533BX

ARCHITECT/DESIGNER INFO

INSTALLATION SHOWN

Mortar: Laticrete MVIS

Joint Type: Drystack


BIM DETAILS - SCAN

Revit, Hatch Patterns,

Seamless Textures,

3-Part Specs, DWGS,

SDS, Warranty

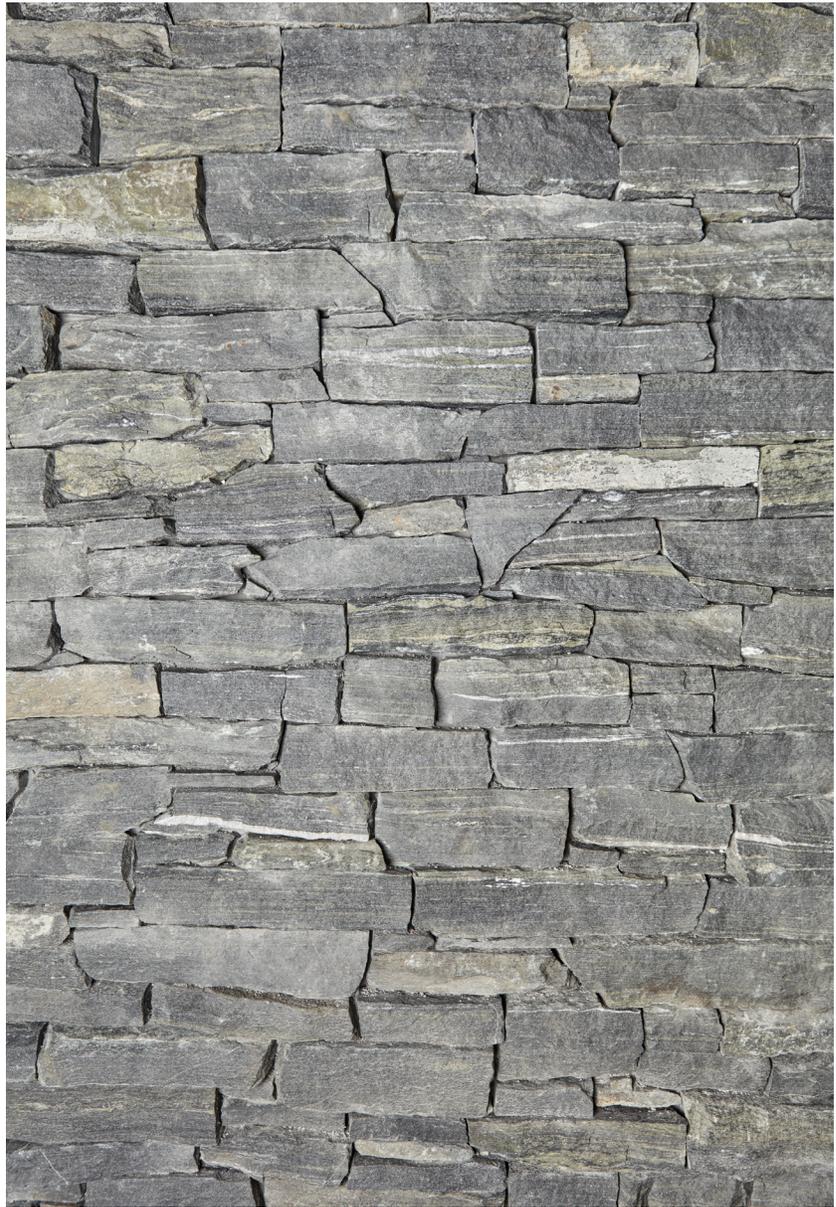

FULL VENEER

COMMON COVERAGE

Standard Joint
35 ft²/ton

Drystack
25 ft²/ton

Overgrout
45 ft²/ton

DIMENSIONS

l: 4" to 16" (8")

h: 1/2" to 3"

w: 3" to 5" (4")

TYPICAL PIECE

Ends random; natural cleft top and bottom; natural splitface, splitface and seamface face; sides natural split or seamface; back split or sawn; stone is linear.

THIN VENEER

COMMON COVERAGE

Standard Joint
8 & 100 square feet

Drystack
6 & 75 ft²

Overgrout
10 & 110 ft²

DIMENSIONS

l: 4" to 16" (8")

h: 1/2" to 3"

w: 3/4" to 1-1/4" (1")

corner return 3" to 6"

TYPICAL PIECE

Ends random; natural cleft top and bottom; natural splitface, splitface and seamface face; sides natural split or seamface; back sawn; stone is linear.



www.buechelstone.com