

TAILORED FIELDLEDGE

BLACK FROST
TAILORED FIELDLEDGE



GEOLOGY

quartzitic sandstone - quarried in USA

COLOR RANGE

blacks, charcoals, grays, blues, whites
with occasional greens, buffs, and
browns

CONSISTENCY PER PALLET

somewhat consistent

PALLET AMOUNTS

FULL VENEER (sold/ton) 4,000lbs each

THIN VENEER (sold/each) QB or BX

QUANTITY BOX - QB

1 - 100 sq ft of flats

1 - 50 lin ft of corners

SMALL BOX - BX

24 - 8 sq ft flat boxes, 192 total ft

20 - 8 lin ft corner boxes, 160 total feet

ASTM TESTING DATA

BLACK FROST C97

water absorption—0.2%

BLACK FROST C97

specific gravity—3.051

BLACK FROST C97

density—190.4 pcf

BLACK FROST C99

modulus of rupture dry—3,040 psi

modulus of rupture wet—2,610 psi

BLACK FROST C170

compressive strength parallel dry—15,070 psi

compressive strength parallel

wet—12,070 psi

compressive strength perpendicular

dry—25,340 psi

compressive strength perpendicular

wet—15,070 psi

PART NUMBERS

FULL VENEER:

N/A

THIN VENEER:

QB flat: 1-TF-1021-QB

BX flat: 1-TF-1021-BX

QB corner: 1-TC-1021-QB

BX corner: 1-TC-1021-BX

ARCHITECT/DESIGNER INFO

INSTALLATION SHOWN

Mortar: Laticrete MVIS


Joint Type: Drystack

BIM DETAILS - SCAN

Revit, Hatch Patterns,
Seamless Textures,
3-Part Specs, DWGS,
SDS, Warranty



CORNER INSTALLATION

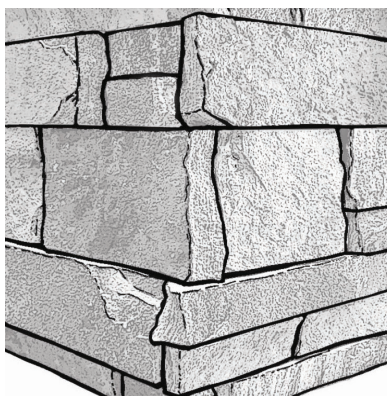

THIN VENEER

COMMON COVERAGE

Figured for Drystack Joint Only
8 & 100 square feet

DIMENSIONS

l: 3" to 24" (8")

h: 2"; h: 4"; h: 6"

w: 3/4" to 1-1/4" (1")

corner return N/A - Butt Jointed
note: sawn heights with varying lengths
having rough irregular ends

TYPICAL PIECE

Ends irregular; random lengths;
sawn top and bottom; sides not square;
bedface and split face and sawn back;
overall appearance of stone will be linear
when installed.

SEE CORNER EXAMPLE TO THE LEFT